

TELESCOPIC BOOMS

H 21 TX



- 55 ft 9 in (17 m) outreach.
- 793 lb (360 kg) platform capacity.
- Foam filled tyres.
- 14 in (35 cm) ground clearance.

ISO 9001
GROUP
PINGUELY
HAULOTTE



ARTICULATED BOOMS



VERTICAL MASTS



TELESCOPIC BOOMS



SCISSOR LIFTS



TRAILERS

Haulotte®

ON THE UP

Telescopic booms

The Haulotte® advantages



- Standard foam filled tyres.
- 4 wheel drive.
- Length : 9.1 / 29 ft 10 in.
- Hydraulic differential lock for demanding rough terrain conditions.
- Work platform overload limiter increases safety.
- Large & robust slewing ring
- Simultaneous proportional controls for all movements.
- Side mounted engine for easy access & maintenance.
- Improved productivity through fast boom movement speeds.
- Robust, reliable, easy to maintain design.

STANDARD FEATURES

- 62 ft (18.86 m) platform height
- 5° tilt alarm
- 180° hydraulic platform basket rotation
- Silent pack Hatz diesel engine
- Free wheeling device
- Electric emergency lowering system
- Safe use in winds up to 37 mph (60 km/h)
- Simple uncomplicated operational controls
- Turret slewing lock rod
- Hourmeter
- Towing hooks / lifting eyes
- 2 hooks for safety harness in platform

OPTIONS & ACCESSORIES

- Large platform (2.3 m x 0.8 m / 7 ft 6 in x 2 ft 7 in)
- Rotating beacon
- Catalytic exhaust
- Working light
- Travel alarm
- Power line to cage
- Airline to cage
- Hostile environment kit
- Encoded starting device
- Cold countries kit
- Hot countries kit
- Road tyres / Sand tyres
- On-board generator 3,3 kW

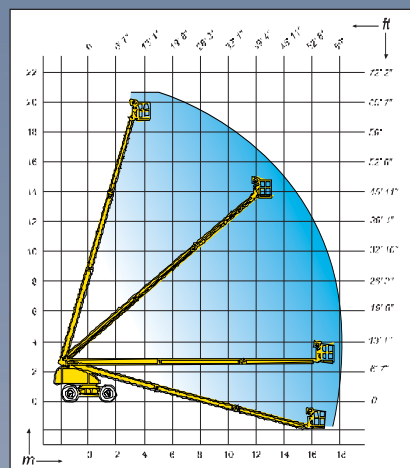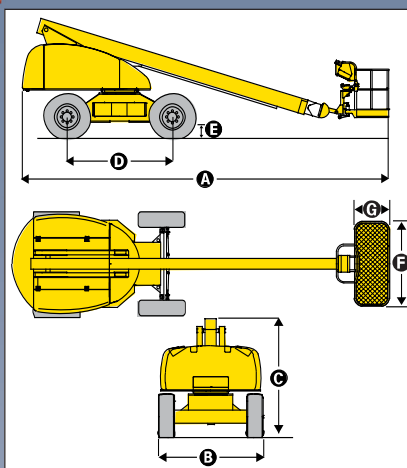

SPECIFICATIONS

Working Height	68 ft	20.86 m
Platform Height	62 ft	18.86 m
Horizontal Reach	55 ft 9 in	17 m
Platform Capacity	793 lb	360 kg
A Length	29 ft 10 in	9,1 m
B Width	8 ft	2.46 m
C Stowed Height	9 ft 4 in	2.86 m
D Wheelbase	8 ft 2 in	2.49 m
E Ground clearance	1 ft 1 in	35 cm
F x G Platform size	71 in x 32 in	1.8 m x 0.8 m
Tailswing	3ft 7 in	1.1 m
Drive speed	0.9 - 3.1 mph	1.5 - 5.0 km/h
Outside turning radius	21 ft 3 in	6.5 m
Turntable Rotation - Continuous	360°	360°
Platform Rotation	180°	180°
Power source	Diesel 53 hp - 38 kw	
Controls	12 V proportional	
Gradeability	40%	
Tyres (Foam Filled)	15 R 22.5 XF	
Hydraulic tank	40 gallons	150 l
Fuel tank	40 gallons	150 l
Weight	27.866 lb	12.640 kg



D I S T R I B U T E D B Y



HAULOTTE UK LTD • Stafford Park 6 - Telford - Shropshire TF3 3AT - UK • Tel : +44 (0)1952 292753 • Fax : +44 (0)1952 292758 • e-mail: haulotte@haulotte.co.uk
HAULOTTE SCANDINAVIA AB • Aröds Industriväg 66B - 44243 Hisingsbacka - SWEDEN • Tel : +46 (0) 31 744 32 90 • Fax : +46 (0) 31 744 32 99 • e-mail: hwallin@haulotte.se
HAULOTTE AUSTRALIA PTY LTD • 39 Nicholas Drive - Dandenong - VIC - 3175 - AUSTRALIA • Tel : +61 (0)3 9706 6787 • Fax : +61 (0)3 9706 6797 • e-mail: sales@haulotte.com.au
PINGUELY-HAULOTTE GROUP • La Péronnière - B.P. 9 - 42152 L'Horme - FRANCE • Tél : +33 (0) 4 77 29 24 24 • Fax : +33 (0) 4 77 29 43 95 • e-mail: haulotte@haulotte.com
 Web : <http://www.haulotte.com>

2420604550 - Ed. 03/2004 - Copyright © by Pinguely-Haullotte - products specifications are subject to change without notice - non contractual pictures